



- Body valve: Brass CW510L food compliance
- IP rate 65
- 2/2 and 3/2 way
- Dual Orientation Coil: earth faston upward or downward
- Seals: Ruby and FKM
- Sealing seat in Stainless Steel
- Easy Serviceable

Seires 6770
2/2 way



Series 6270
3/2 way





Series 6270
3/2 way



Series 6770
2/2 way

HIGHLIGHTS

- Coil size 33mm
- 3/2 and 2/2 way NC - Direct acting
- ED 100%
- Professional Coffee
- Seat seal in stainless steel

GENERAL FEATURES

Body material	Brass CW 510 L	
Seal material	Ruby (FKM 3° way)	
Tube Material	Stainless Steel	
Working fluids	Water	
Insulation class	H	
Electrical Connect.	6,3 x 0,8 fast on terminal - UNI ISO 4400	
Fluid temperature	140°C	
Coil Voltage	220-230V 50/60Hz	110-120V 60Hz
Coil Power	17 VA	22 VA
Ambient Temp.	120°C	80°C
Approvals	VDE CE	UL


PERFORMANCE

Orifice size (mm)	Flow m ³ /h	M.O.P.D. (bar)	
		AC	DC
1,5	0,065	12	12



Coffee

SERIES 6270 - 3/2 WAY

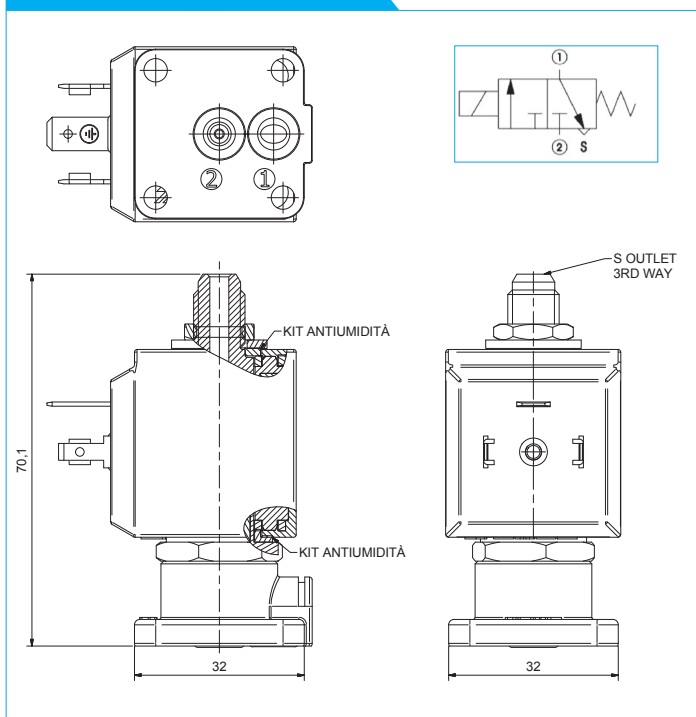

SERIES 6770 - 2/2 WAY

