

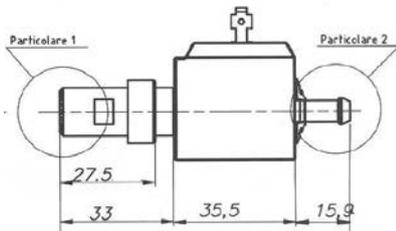


Family pump E300



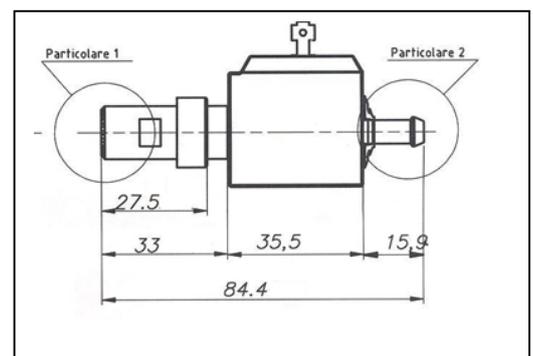


- Class 155°
- Electrical insulation, class II
- ED 100%
- Diode not integrated

Technical data				
Body material	PA66 + PPS			
Seal material	EPDM+NBR			
Tube material	Stainless steel			
Electrical connect	6,3 x 0,8 fast-on terminal			
Insulation class	F			
Coil voltage	230V 50Hz	120V 60Hz	100V 50/60Hz	24V 50Hz
Coil power	20W	20W	20W	20W
Approvals	VDE CE	UL	CE	CE
Ambient temperature	60 °C			
Fluid temperature	35 °C			
Suction power	100mbar			

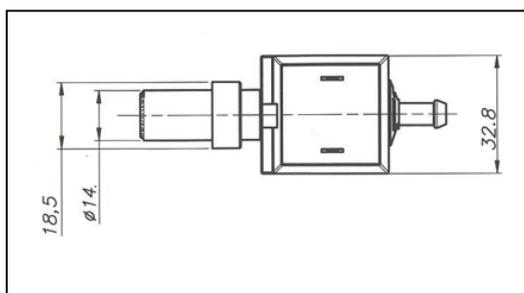

Pump model					
	Coil power	outlet	inlet	Pmax [bar]	Flow max at 0bar [cc/min]
E300	20W	A-B-C	1	5,3	450

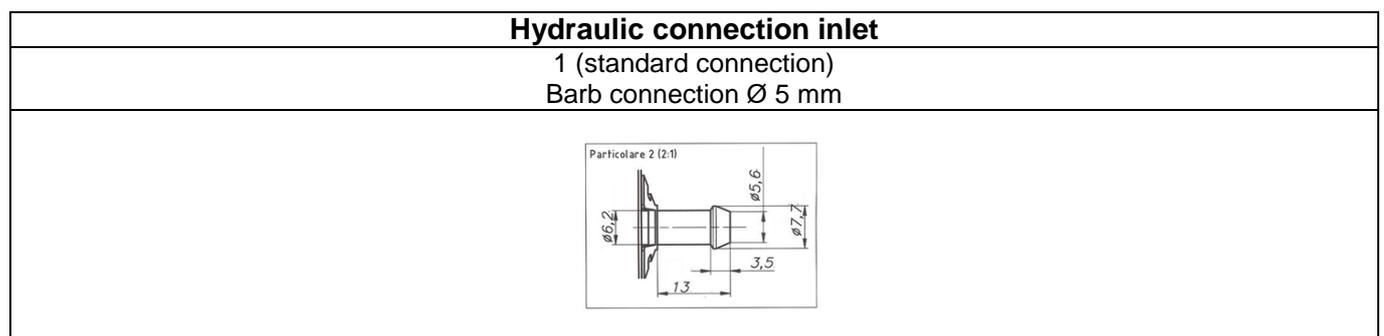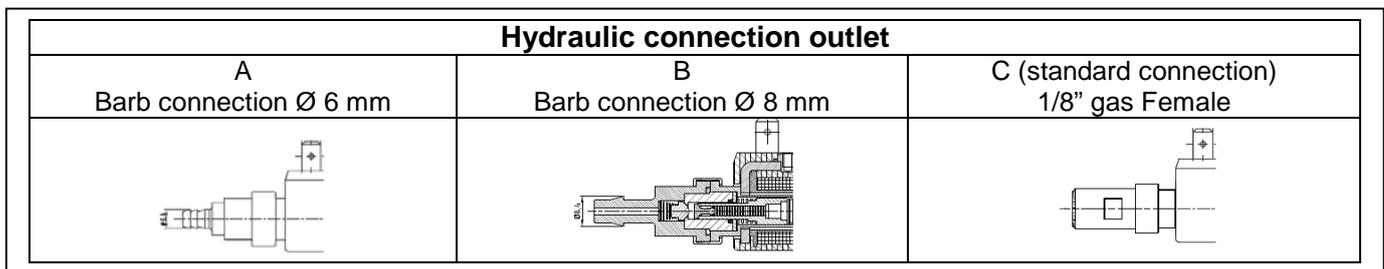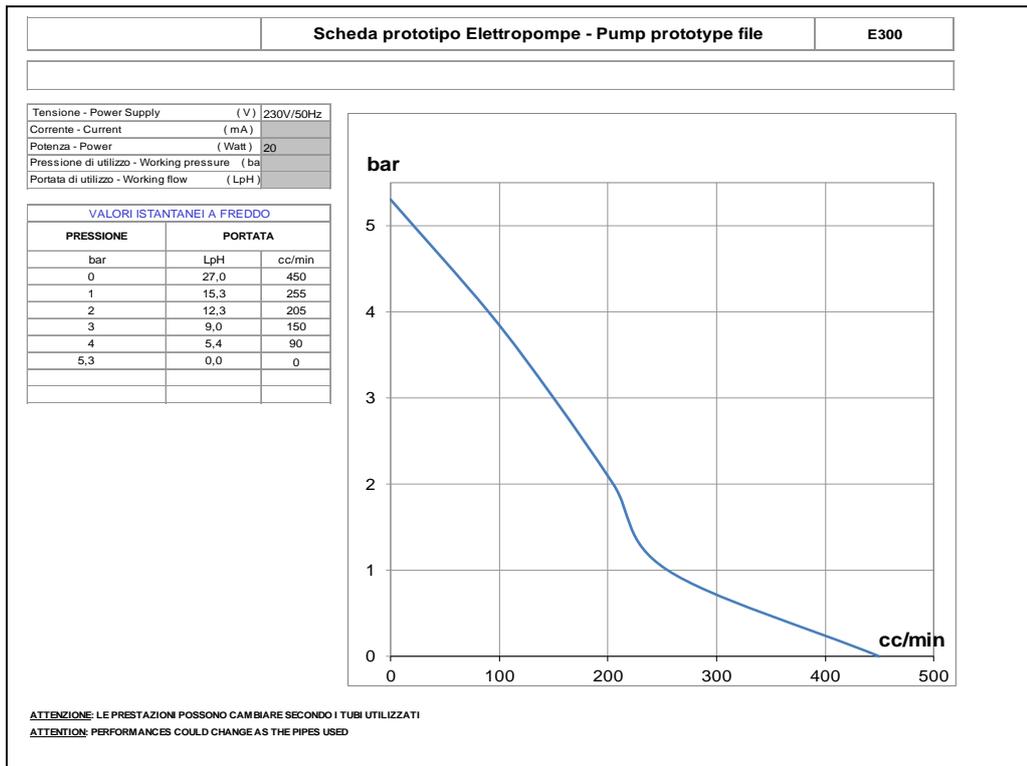

NOTE / NOTES

“Tutte le tipologie di pompe sono progettate e verificate utilizzando come fluido l’acqua. Sconsigliamo stoccaggi lunghi e/o temperature di magazzino elevate soprattutto con pompe prive di acqua all’interno: in questi casi vi suggeriamo di contattare il nostro ufficio tecnico per consigli in proposito ad evitare malfunzionamenti delle pompe.”

“All types of pumps are designed and tested using water as the fluid. We do not recommend stocks long and/ or high storage temperatures above pump without water inside: in these cases we suggest that you contact the technical department for advice in this regard to prevent malfunction of the pump.”